



DESCOMAD

WOOD AND METAL PANELS RELEASE AGENT - CONCENTRATED

» **Features**

Soluble oil.

» **Properties**

DESCOMAD is easily emulsifiable with water, to guarantee the preservation of wood and metal formwork.

» **Utilization**

DESCOMAD is used diluted in a proportion of 1 litre until 15 litres of water. For an effective emulsion join the product with water.


Its application can be made by spraying, brush or other mechanical way. 1 liter of emulsion covers approximately 20 m².

» **Caution**

Keep out of children reach. Close the package after use. Always carry out a test to determine the compatibility and the contact time appropriate
Chemical Product: Always read the label before using.



**Economic
Ecological
Effective**

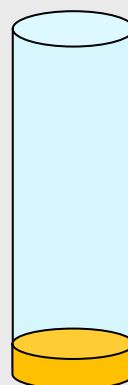

**15 parts of
water**

**1 part of
DESCOMAD**

